


DIN 11851

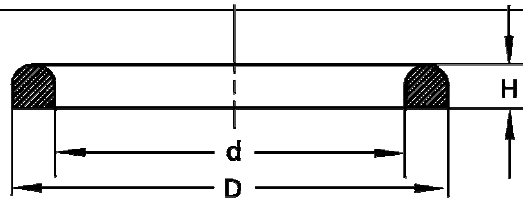

DIN 11857

| DN | d BORE | Ø D | Ø H | UNION NUT DIA | EPDM | FPM | PTFE | NBR |
|-----|--------|-----|-----|---------------|------|-----|------|-----|
| 10 | 12 | 20 | 4,5 | 38 | * | * | | * |
| 15 | 18 | 26 | 4,5 | 44 | * | * | | * |
| 20 | 23 | 33 | 4,5 | 54 | * | * | * | |
| 25 | 30 | 40 | 5 | 63 | * | * | * | * |
| 32 | 36 | 46 | 5 | 70 | * | | | |
| 40 | 42 | 52 | 5 | 78 | * | * | * | * |
| 50 | 54 | 64 | 5 | 92 | * | * | * | * |
| 65 | 71 | 81 | 5 | 112 | * | * | | * |
| 80 | 85 | 95 | 5 | 127 | * | * | * | * |
| 100 | 104 | 114 | 6 | 148 | * | * | * | * |
| 125 | 130 | 142 | 7 | 178 | * | | | * |
| 150 | 155 | 167 | 7 | 210 | * | * | | |

* Elastomers available

Ordering example: DIN-Nr + DN + Elastomer (DIN 11857 10 EPDM)

Elastomers available:

Elastomer: EPDM
 FDA CFR21:177.2600
 Colour: Black

Elastomer: FPM
 FDA CFR21:177.2600
 Colour: Black

Elastomer: NBR
 FDA CFR21:177.2600
 Colour: Blue

Material: PTFE
 FDA CFR21:177.1550
 Colour: White

WARNING: Limits of application stated herein are standard values. They could be individually transgressed with due consideration to respective service conditions. In the event of a large duty cycle, pulsating operation and other complex operational conditions, simultaneous transgression of these values is not recommended. Due to a large variety of service conditions that may arise in course of actual use, the company does not take responsibility of or guarantee the functional accuracy of the individual components. Rights for changes are reserved.