


ISO 2852

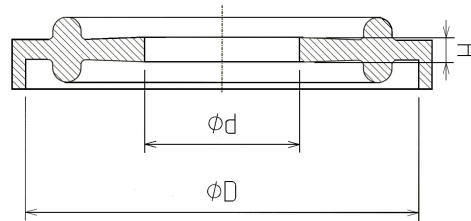

ISO 2852

DN	d BORE	Ø D	Ø H	FLANGE DIA.	EPDM	VMQ	VMQ/600	FPM	NBR	PTFE	ENVELOPE	KALREZ
12,7	10,9	34	2,1	34								
17,2	15,4	34	2,1	34								
21,3	19,5	34	2,1	34								
		34	2,1	34	*		*					
25	22,8	50,5	2,1	50,5	*	*	*	*	*	*	*	*
33,7	31,5	50,5	2,1	50,5								
38	35,8	50,5	2,1	50,5	*	*	*	*	*	*	*	*
		50,5	2,1	50,5	*		*			*		
40	37,8	64	2,1	64								
51	48,8	64	2,1	64	*	*	*	*	*	*	*	*
63,5	60,5	77,5	2,1	77,5	*	*	*	*	*	*	*	*
		77,5	2,1	77,5	*							
70	67	91	2,1	91								
76,1	73,1	91	2,1	91	*	*	*	*	*	*	*	
		91	2,1	91	*							
88,9	85,1	106	2,1	106	*					*		
101,6	97,8	119	2,1	119	*	*	*	*	*	*	*	
114,3	110,5	130	2,1	130	*		*					
127	120,2	144,5	2,1	144,5	*		*					
139,7	135,9	155	2,1	155								
152,4	147,2	167	2,1	167	*		*					
168,3	163,3	183	2,1	183	*					*		
203,2	198,2	217,5	2,1	217,5	*		*					
219,1	214,1	233,5	2,1	233,5	*				*	*	*	
254	250,2	268	2,1	268	*		*					

* Elastomers available

Ordering example: ISO-Nr. + DN + Elastomer (ISO 2852 25 VMQ/600)

Elastomers available:

Elastomer: EPDM - EPDM/400
 FDA CFR21:177.2600/USP Class VI
 Colour: Black

Elastomer: NBR - NBR/001
 FDA CFR21:177.2600/USP Class VI
 Colour: Black

Elastomer: FPM – FPM/300
 FDA CFR21:177.2600/USP Class VI
 Colour: Green

Elastomer: VMQ PLATINUM - VMQ/600
 FDA CFR21:177.2600/USP Class VI
 Colour: Transparent

Elastomer: ENVELOPE PTFE/FPM
 FDA CFR21:177.1550
 Colour: White / Black

Material: PTFE
 FDA CFR21:177.1550
 Colour: White

Elastomer: KALREZ 6230 3A Sanitary
 FDA CFR21:177.2600/USP Class VI
 Colour: Black

Elastomer: VMQ
 FDA CFR21:177.2600
 Colour: White

WARNING: Limits of application stated herein are standard values. They could be individually transgressed with due consideration to respective service conditions. In the event of a large duty cycle, pulsating operation and other complex operational conditions, simultaneous transgression of these values is not recommended. Due to a large variety of service conditions that may arise in course of actual use, the company does not take responsibility of or guarantee the functional accuracy of the individual components. Rights for changes are reserved.